

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:
A43B 13/20

A1 (11) International Publication Number: WO 91/16831
(43) International Publication Date: 14 November 1991 (14.11.91)

(21) International Application Number: PCT/GB91/00740
(22) International Filing Date: 9 May 1991 (09.05.91)

(30) Priority data: 9010336.7 9 May 1990 (09.05.90) GB

(71)(72) Applicant and Inventor: SEYMOUR, Robert, John [GB/GB]; 55 Durlston Road, Kingston-upon-Thames, Surrey (GB).

(74) Agent: GREENE-KELLY, James, Patrick; Marks & Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS (GB). (81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (Utility model), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(\$4) Title: A SHOE AND A SOLE THEREFOR

18b

19 16a

15

17

15

(57) Abstract

A sole for a shoe is disclosed which includes a resilient mid-sole (14) in which first and second flexible containers (18) are inset at the heel and forefoot regins of the sole. The containers are filled with a fluid which provides a cushioning medium and a connecting tube (19) provides a balancing of fluid pressure between the containers (19) as well as cushioning along the pressure path of the foot on the outside edge thereof. The embodiment of the invention also provides a valve of rmed by ribbed members (16) which constrict tube (19) when pressure is applied to them to trap increase in fluid pressure transferred into the forefoot container on initial heel impact to give an extra platform of resistance under the forefoot for a better push-off and "kick".

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

CS Czechoslovakia Lik Sii Laista	AT AU BB BE BF BG BJ BR CA CF CG CH C1 CM CS	Austria Australia Barbados Belgium Burkina Faso Bulgaria Benin Brazii Canada Central African Republic Congo Switzeriand Côte d'Ivoire Cameroon Czechoskovakia	ES PI FR GA GB GN HU IT JP KP LI LI LK	Spain Finland France Gabon United Kingdom Guinea Greece Hungary Italy Japan Democratic People's Republic of Korea Republic of Korea Liechtenstein Sri Lanka	MG ML MN MR MW NL NO PL RO SD SB SN SU TD TG	Madagascar Mali Mongolia Mauritania Malawi Netherlands Norway Poland Romania Sudan Sweden Sweden Senegal Soviet Union Chad Togo	·
DE Germany LU Lincombourg US United States of DK Denmark MC Monaco	DE	Germany	LU	-	US	United States of Ame	rica

WO 91/16831 PCT/GB91/00740

A SHOE AND A SOLE THEREFOR

5

10

15

20

This invention relates to soles for shoes more particularly, but not exclusively to athletic and sports shoes.

When running or walking, the natural pressure path of the foot in a normal pronating person commences with impact on the outside rear edge of the heel, the weight is then transferred along the outside edge of the foot as it rolls forward and then moves across the ball of the foot to end under the big toe ready for the push-off forward.

It has been proposed to provide cushioning for the impact for the heel only and also a combination of heel and forefoot. These cushioning systems have used various mediums for the cushioning, ranging from air or gas filled compressable sacs to synthetic compressable "memory" plastics. Although such proposals provide a degree of cushioning for the impact they lack a continual cushioning throughout the whole foot plant, roll and push-off along the pressure path. Furthermore, these proposals cannot provide both cushioning and for a substantial base under the forefoot in order to get a better push-off platform and "kick" to improve performance.

25 It is an object of the invention to alleviate these

15

20

25

drawbacks.

According to the invention there is provided a sole for a shoe comprising a first flexible container provided at a heel receiving region of the sole, a second flexible container provided at a forefoot receiving region of the sole, fluid disposed in the first and second containers and means for connecting the first and second containers together in fluid communication.

Preferred features of the invention are provided in Claims 2 - 14.

The embodiment of the invention described comprises a mid-sole of a sports shoe which incorporates compressable sacs moulded in an elastomeric material and filled with either a gas or liquid which provides a cushioning medium. These sacs are placed under the heel area and the forefoot and are embedded into the mid-sole just beneath the upper surface. The two sacs are interconnected via a capillary tube again formed from a compressable elastomeric material which follows the pressure path of the foot on the outside edge and provides a balancing pressure between the two sacs. The embodiment of the invention also provides for a valve means comprising two members formed from a stiff but bendable plastics polymer

10

15

20

25

each with raised integral ridges at intervals along Th se are set into position in a preits length. formed recess above and below the capillary tube, just touching the tube's surface. The ridges face each other across the tube and act to seal the tube when the ridges are pushed together. The embodiment functions by transferring the increase in gas or liquid pressure created on the initial heel impact along the capillary tube into the forefoot sac and trapping this increase in pressure by operation of the valve means by the rolling foot to give an extra platform of resistance under the forefoot for a better push-off and "kick". On push off the pressure created pushes the gas or liquid back along the capillary tube to the heel sac and the system pressure equalises throughout whilst the foot is off the ground ready for the next stride.

An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings in which:

Fig. I. shows the imprint of a normal pronating foot and pressure path when the foot is in contact with the ground during running or walking.

Fig. II. shows an exploded view of an embodiment of the invention applied to the mid-sole of a sports sh e.

Fig. III. shows the impact point of a foot when

10

20

running or walking.

Fig. IV. shows the pressure points along the foot during the roll stage of running or walking.

Fig. V. shows the push-off point under the toes during running or walking.

Fig. VI. is a section through the mid-sole of a sports shoe incorporating an embodiment of the invention.

Fig. VII. is a section through the mid-sole of a sport shoe incorporating an embodiment of the invention through the dotted line III - III shown in Figure VI.

Fig. VIII. is a section as in Figure VII. with pressure applied.

Fig. IX a, b & c illustrate different shapes of reservoir to compensate for walking abnormalities.

Fig. I. shows the imprint of the foot during running or walking and indicates the load pressure path created during each stride. The load pressure 10 starts at the outside of the edge of the heel 10 on impact then travels along the outside portion of the foot 11 then crosses over the forefoot area 12 and finally finishes behind the big toe 13 on push-off.

Fig. II. shows an exploded view of the components of an embodiment of the invention as applied to a sports shoe. A mid-sole 14 which is made from a cellular

SUBSTITUTE SHEET

10

15

20

foam is provided with moulded recesses 15 which accept the components of the embodim nt of the invention. An injection moulded plastic strip 16a with integral raised ridges is placed into the base of a connecting channel 17 between two main recesses Two at least partially flexible sacs or 15. reservoirs made from a plyable plastic blow moulded into containers 18a and 18b are provided. These two containers 18 are connected by a capillary tube 19 moulded in a plyable plastic. The tube may be of circular cross-section or ellipsoidal cross section, in which case the major axis of the ellipse lies between the sides of the channel 17. The complete unit being filled with a liquid or gas, for example, 750 CPS gel liquid and placed into the pre-formed recesses in the mid-sole approximately two to three millimetres below the mid-sole surface. A further strip 16b is then bonded into the recesses 20 above the capillary tube 19, the strips 16 acting as a constricting means for the tube 19 to provide a valve to regulate flow of liquid or gas between the The mid-sole is bonded with a shoe containers 18. insole and outer rubber sole to form a complete shoe.

The containers 18 and connecting tube 19 provide cushioned support along the complete pressure path shown in Fig. I and by operation of the valve, fluid

10

20

25

- 6 -

in the forefoot container 18 can be trapped during motion to provide a better "push-off" platform. operation of the described embodiment is shown in Figs. III - V.

Fig. III. shows the foot in the heel impact position, in which impact pressure 21 is generated in the rear heel reservoir 18a, which forces the gas or liquid through the capillary tube 19 to the forefoot reservoir 18b. Fig. IV. shows the foot in the roll position in which pressure applied along the outside of the foot 25 activates the valve to constrict the tube 19 which traps the fluid in the forefoot reservoir. Fig. V. shows the foot in the push-off position with the load 27 on the front reservoir 18b which then pushes the gas/liquid back along the 15 capillary tube 19 to the rear reservoir 18b.

> Fig. VI, VII and VIII. illustrate the valve of the embodiment of the invention in more detail.

Injection moulded strips 16 and 16b have projecting ribs 34 which trap the gas/liquid contained within the capillary tube 19. The ribs 34 of the strip 16a below the tube 19 are in register with those of the strip 16b above the capillary tube 19. The tube 19 and strips 16 may be formed as one piece. The assembly is mounted within the mid-sole medium 14

10

· 15

20

25

- 7 -

which is made from a cellular foam onto which an outer rubber sole 38 is bonded. The sole also includes a synthetic sponge inner sole 31 which is inserted into a last board 32. Fig. VIII. is a section through the plane III - III in Fig. VI. and shows in addition to the construction in Fig. VI. a shoe upper 41 which is integral with the board last 32. At the base of the channel 17, a foam layer 37 is provided which gives a firmer base for the capillary tube assembly 16, 19 to compress. VIII. shows a sectional view as in Fig. VII. but with a load applied as would happen during the roll stage of the foot shown in Fig. IV., compressing the capillary tube 19 and effectively sealing the tube so gas/liquid forced into the forefoot reservoir cannot return.

The size and shape of the reservoirs 18 may be chosen to compensate for over pronation and supination, as illustrated in fig. IXa, b and c in which fig. IXa shows the reservoir shape for a sole for a normally pronating person, fig. IXb for a sole for a person who over pronates and fig. IXc for a person who over supinates.

The described embodiment aims to provide a constant cushioning of the foot pressure during walking or running and allows transfer of the displaced pressure

increase of the reservoir in the heel after impact via a capillary tube to the front reservoir, increasing the push-off platform for a better "kick" at each stride.

Numerous variations and modifications to the illustrated construction will readily occur to the reader who is skilled in the art within the scope of the present invention.

CLAIMS

- 1. A sole for a shoe comprising:

 a first flexible container provided at a heel receiving region of the sole,

 a second flexible container provided at a forefoot receiving region of the sole,

 fluid disposed in the first and second containers; and


 means for connecting the first and second containers together in fluid communication.
 - 2. A sole as claimed in Claim 1 wherein the connecting means is flexible.
- A sole as claimed in Claim 2 wherein the connecting means is formed from a resilient
 tube.
 - 4. A sole as claimed in Claim 2 or Claim 3 wherein the connecting means is provided at a foot outer edge receiving region of the sole.
- 5. A sole as claimed in claim 1, further comprising valve means for regulating flow of fluid between the containers.


- 6. A sole as claimed in Claim 5 wherein the connecting means is flexible and the valve means comprises means for constricting the connecting means.
- 5 7. A sole as claimed in Claim 6 wherein the connecting means is provided at a foot outer edge receiving region of the sole.
- 8. A sole as claimed in Claim 7 wherein the constricting means comprises at least one ribbed member disposed adjacent the connecting means.
 - 9. A sole as claimed in Claim 8 wherein the constricting means comprises a further said ribbed member, the ribbed members being disposed on opposed sides of the connecting means.
- 15 10. A sole as claimed in Claim 9 wherein the opposed ribs of the ribbed members are in register with one another.
- 11. A sole as claimed in any one of the preceding claims wherein the containers and connecting


 means are inset in a resilient mid-sole.
 - 12. A sole as claimed in Claim 11 wherein the connecting means is disposed in a slot in the


mid-sole and a support of higher resilience than the mid-sole is provided at the base of the slot.


- 13. A sole as claimed in any one of the preceding claims wherein the second flexible container extends across the sole and tapers from one side of the sole to the other.
 - 14. A shoe including a sole as claimed in any one of the preceding claims.
- 10 15. A shoe as claimed in Claim 13 being a sport's shoe.

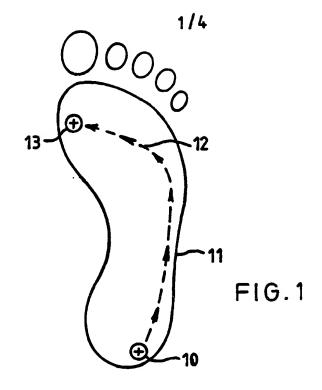


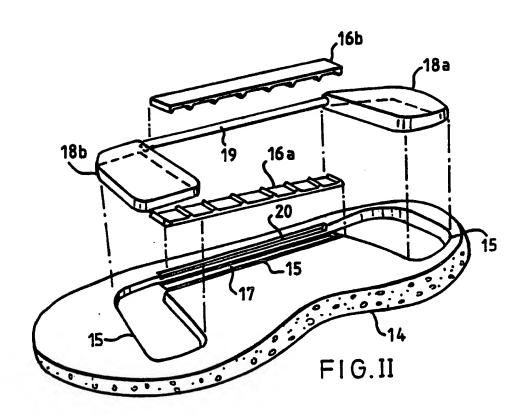


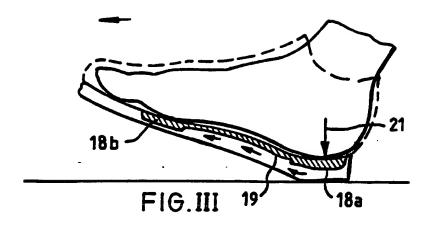


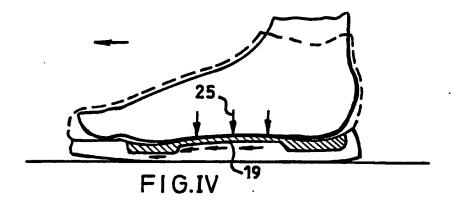


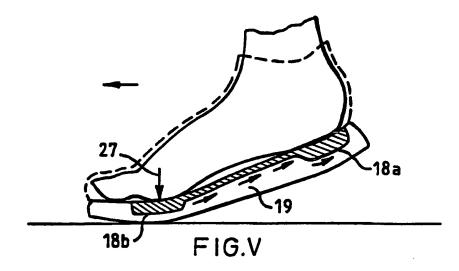

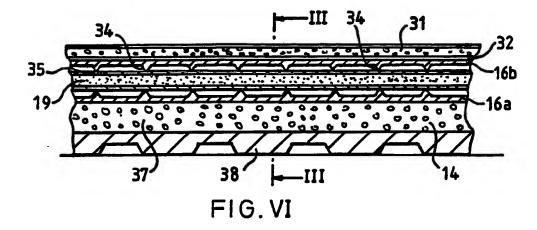

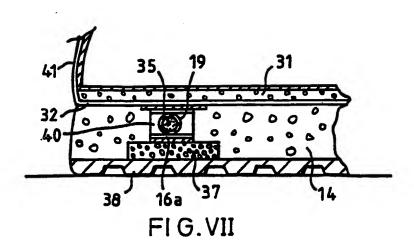

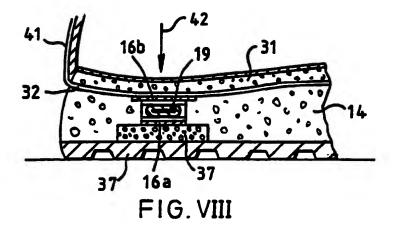

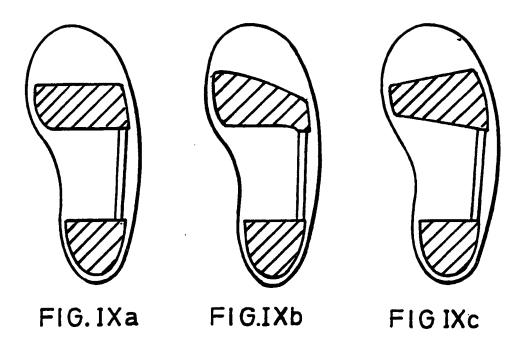

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 91/00740

	IFICATION F SUBJECT MATTER (it several classification symbols apply, indicate all) 6	
According	to International Patent Classification (IPC) or to both National Classification and IPC	
IPC ⁵ :	A 43 B 13/20 -	_
II. FIELDS	S SEARCHED	
	Minimum Documentation Searched 7	
Classification	on System Classification Symbols	
IPC ⁵	A 43 B	
	Documentation Searched other than Minimum Documentation to the Extent that such Documents are included in the Fields Searched 9	
III. DOCU	MENTS CONSIDERED TO BE RELEVANT	
Category *	Citation of Document, 11 with indication, where appropriate, of the relevant passages 12	Relevant to Claim No. 12
x	GB, A, 2114425 (CLARKS) 24 August 1983	1-6,14,15
х	EP, A, 0062622 (L. PETERSON) 13 October 1982	1-3,14,15
x	FR, A, 2413893 (P. WILL) 3 August 1979	1-3
x	FR, A, 2452889 (W. REBER) 31 October 1980	1
•	·	
"A" doc con filin "L" doc whi cita "O" doc oth	il categories of cited documents: 10 ument defining the general state of the art which is not sidered to be of particular relevance. Ier document but published on or after the international grate ument which may throw doubts on priority claim(s) or ch is cited to establish the publication date of another tion or other special reason (as specified) ument referring to an oral disclosure, use, exhibition or ar means ument published prior to the international filing date but r than the priority date claimed "T" later document published after the or priority date and not in confiling clase to understand the principal invention "X" document of particular relevant cannot be considered novel or involve an inventive step "Queent of particular relevant cannot be considered to involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular relevant cannot be considered novel or involve an inventive step "Y" document of particular	or theory underlying the ce; the claimed invention cannot be considered to be; the claimed invention in invention an inventive step when the or more other such documentation to a person skilled
	IFICATION	arch Report
Date of the	Actual Completion of the International Search 17th July 1991 Date of Mailing of this International Search 0 9, 09, 91	and report
leter-sti-	St	1. 1/
(memanon	EUROPEAN PATENT OFFICE miss T MORTENSEN	Mul / total

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 9100740 SA 47691

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 27/08/91

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2114425	24-08-83	None	
EP-A- 0062622	13-10-82	DE-A- 3277831 JP-A- 57177703 SE-A- 8102124 US-A- 4458430	01-11-82 03-10-82
FR-A- 2413893	03-08-79	DE-A- 2800359	12-07-79
FR-A- 2452889	31-10-80	DE-A,C 3012945 JP-B- 2015202 JP-A- 55133203 US-A- 4312140	11-04-90 16-10-80

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82